

MFSC

800W~1500W

Single Module CW Fiber Laser



Product Feature



Up to 6KW Output From CW Single Module Series

Better beam quality vs. multi module lasers
Greatly improved efficiency



Excellent Material Processing Performance

High speed in thin sheet cutting
Strong capability in thick material processing



Compact Design, Maintenance Free

Highly integrated system with modular design
Easy maintenance significantly reduce TCO



Smaller Size with Higher Stability

>60% reduction in volume
Higher flexibility when integrated in to system



High Level Vertical Integration


All key components are designed and produced in house
Strict quality control, high consistency and reliability

MAX PHOTONICS

MFSC 800W~1500W Fiber Laser Specifications

Models	MFSC-800W	MFSC-1000W	MFSC-1300W	MFSC-1500W
OPTICAL SPECIFICATIONS				
Nominal Power	800W	1000W	1300W	1500W
Mode of Operation	CW/Modulated			
Polarization	Random			
Power Tunability	10 to 100%			
Wavelength	1080 ± 5 nm			
Power Stability	±1 %			
Laser Beam Quality M ²	1.3(20uQBH)			
	2.8(50uQBH)			
Modulation Frequency	≤ 20kHz		20~50kHz	
Preview Red Light Power	150 μW			
FIBER DELIVERY SYSTEM				
Interface	QBH(LOC)			
Length	15m standard, other lengths optional			
Diameter	50(20/30/100) μm			
Bending Radius	200 mm			
ELECTRICAL RATINGS				
Supply Voltage	220VAC (-15% to +10%) Single-phase			
OTHER SPECIFICATIONS				
Operating Temperature	+10 to +40°C			
Storage Temperature	-10 to +60°C			
Humidity	10 to 85%			
Cooling Method	Water Cooling			
Cooling Medium	Distilled water/ Glycol Antifreeze			
Dimension	800×482.6×193.2 mm			
Weight	50(±3)kg		88kg	

Mechanical Specifications (mm)

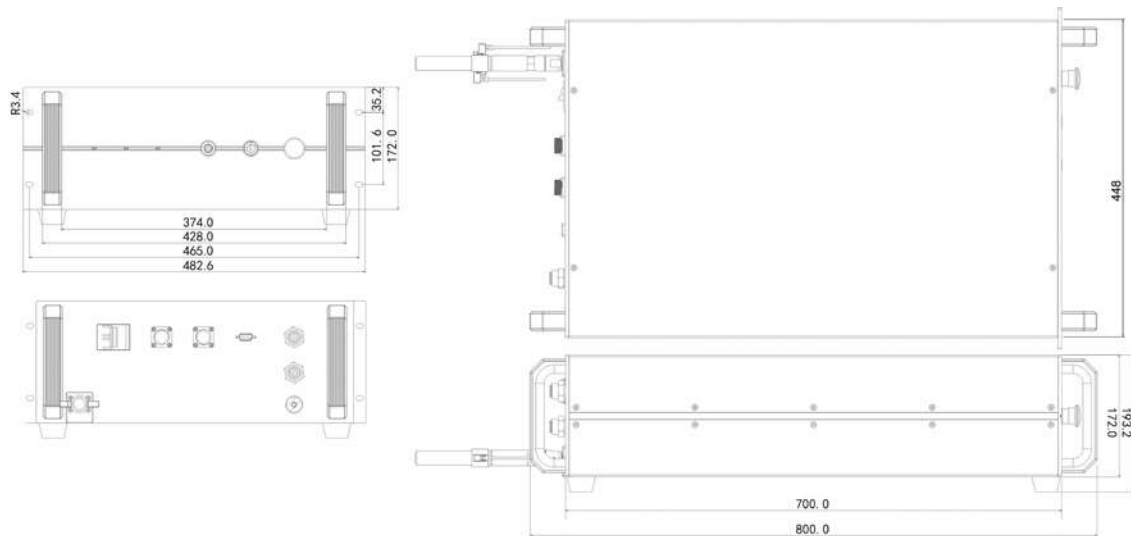

Maxphotonics Co.,Ltd.

Address: Maxphotonics Industrial Park, 3rd Furong Road,
Furong Industrial Area, Shajing, Bao'an, Shenzhen, China.518125
E-Mail: sales@maxphotonics.com <http://en.maxphotonics.com>

MAX PHOTONICS